

SPECIFICATIONS



- CURRENT RATING: 1.5A
- VOLTAGE RATING: 125V AC
- INSULATION RESISTANCE: 500MΩ Mini; AC 1500 V RMS 50Hz OR 60Hz 1 Min
- WITHSTAND VOLTAGE: 20mΩ Max
- CONTACT RESISTANCE: 2 CONTACTS-----350g 4 CONTACTS-----500g
- INSERTION FORCE: 6 CONTACTS-----750g 8 CONTACTS-----900g
- RETENTION STRENGTH: 7.7kg BETWEEN JACK AND PLUG
- DURABILITY: 10 CONTACTS-----1050g
- HOUSING: 1) GLASS FILLED PA66 (UL 94V-0)
- 2) GLASS FILLED PA46 (UL 94V-0)
- 3) GLASS FILLED PBT (UL 94V-0)
- SPRING WIRE: 1) 0.45mm DIA PHOSPHOR BRONZE GOLD PLATING OVER NICKEL
- 2) 0.35mm THICKNESS PHOSPHOR BRONZE ALLOY SELECTIVE GOLD PLATING OVER NICKEL
- SHIELDING: 0.25mm THICKNESS COPPER ALLOY WITH TIN PLATED
- GOLD PLATING: 3μ", 6μ", 15μ", 30μ", 50μ"
- WORKING TEMPERATURE: -40° to 70°

"B" with the company code

Series of products: 8P: modular KHS + transformer series; 90: Single KHS + ordinary KHS series; 3M: that strip line series; 40: Conversion sold connectivity 80-series; that KK: 91: automatic connector public Block; 92: automatic connector mother Block; 95: SMT series; 98: MRS for switches

Family code (sequence id): 1-99

Type of product code: G: Original KHS transformer; E: Inductive KHS transformer; Y: for no transformer KHS products; N: Series for board-mounted device; B: Series for board-mounted device

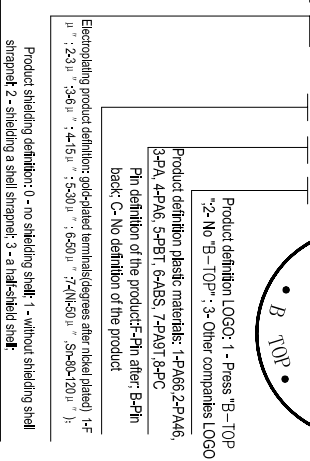

DTOP
 Dongguan BroadTop Electronic Technology Co., Ltd.

Designed
 Checked
 Approved

MATERIAL
 SCALE 3:1 UNIT mm MODEL NO.

DESCRIPTION B59(22)W-A012-F12(1X1 F3.05)

FIRST ANGLE PROJECTION
 TEL: 0769-38926198
 FAX: 0769-38926199
 Website: http://www.btoptech.com

REV. V1.0

REV. V1.0

REV. V1.0