

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D





D

E

E

F

F

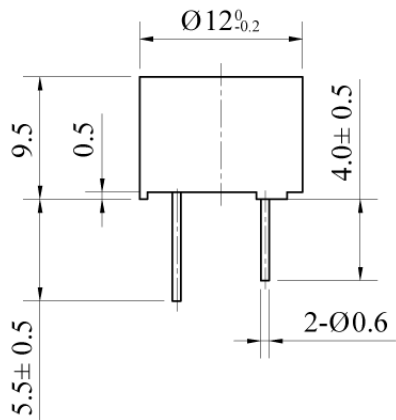

SPECIFICATION

- 1. Rated Voltage 9 VDC
- 2. Operating Voltage 7~12 VDC
- 3. Max. Rated Current 30mA/9VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 2300±300Hz
- 6. Response Time 50ms
- 6. Case Material PBT
- 7. Operating Temperature -20~+70°C
- 8. Store Temperature -30~+80°C
- 9. Weight 2g

			KEPO KEPO ELECTRONIC CO., LTD. http://www.kepo.com.tw	
			Magnetic Buzzer	
			KPX-1209A	
No.	DESCRIPTION	APPROVED	DATE	
TOLERANCES UNLESS NOTED OTHERWISE: X .° XX .° XXX .° 90° FORMED -2° ANGLES -1° FIRST ANGLE PROJECTION		APPROVALS	DATE	
		DRAWN		UNIT
		CHECKED		mm
		APPROVED	05.02.26	DWG NO. KP3.840.690
				SCALE NOT TO SCALE
				SHEET
				VER 1.1

1

2

3

4

5

6

7

8